

SENSOR PRODUCTS SELECTION MANUAL



Wenzhou Gtric Technology Co., Ltd.
TEL:0577-62734566
Web:<http://www.gtric.com>
Mail: yaohaofeng@gtric.com

Company introduction

Wenzhou Gtric Technology Co., Ltd. is located in Yueqing IoT sensors Park, which covers 5,000 square meters, with over 100 employees. We are focuses on intelligent manufacturing and industrial automation, our main businesses are sensors, encoders, button switch, coupling, expansion set and other industrial automation products, providing standard and individual products and solutions for customers.

Our products cover over 20 series, 1000specification, which have passed CCC, CE, UL, ISO9001 certification as well as EU RoHS Environmental Directives.

Based on our technical advantages, Gtric can provide industrial automation solution according to customers' requirements.

**We support OEM & ODM, if you need
please feel free to contact us**



Installation conditions

Non shielded proximity switches can achieve maximum operating distance (with the diameter of the relevant); but in order to prevent the switch around the metal impact on the switch, the sensor head must be in a certain gap with the surrounding metal (Figure 1).

Due to the special shielding effect inside the shield, the radial magnetic field of the side is reduced, and the induction distance is about 60% of the non shield type, because it can be flush mounted in the metal (Figure 2).

The magnetic sensor is not affected by the conditions of installation, as long as the material around the material is not magnetized.



Output mode and electrical characteristics


DC 2-wire system NO or NC													
The load must be connected in series in the sensor to work, there is a polarity and short circuit protection function; in the open circuit state, there is a very small leakage current; in the closed circuit, the switching element has a smaller voltage drop.													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													
DC 3-wire system(N,P type) NO or NC													
These switches are connected to the load and power supply separately; the polarity, short circuit and overload protection function, and the residual current can be ignored.													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													
AC 2-wire system NO or NC													
The load must be connected in series in the sensor, in the closed circuit, the switching element has a smaller voltage drop.													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													
DC 4-wire system (NPN,PNP Type) NO+NC													
Sensor switches can provide 2 groups of output NO+NC													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													
DC 4-wire system (NPN,PNP Type) NO/NC													
The switches can provide two groups of output NO or NC													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													
NO+NC Ac/Dc five wire (relay output) NO + NC													
These switches can provide to often open, closed two group relay output.													
	<table><tr><td>Detection object</td><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>Load</td><td></td><td></td><td></td></tr><tr><td>Indicator detected</td><td></td><td></td><td></td></tr></table>	Detection object	Yes	NO	NC	Load				Indicator detected			
Detection object	Yes	NO	NC										
Load													
Indicator detected													

Sensor characteristics


GTRIC®

❖ Series and parallel connection of proximity switch

OR connection (NPN and PNP types can be used mixed) series When the proximity switch is OR connected, the action of any proximity switch can drive load. The quantity of the proximity switches depends on the sum of leakage current. More connections are available given that it doesn't affect the loading action.

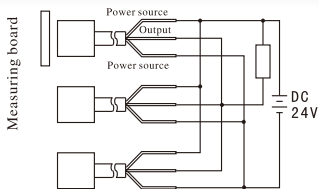


OR connection of NPN output

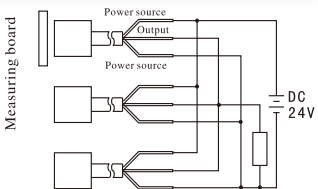


OR connection of PNP output

❖ AND connection (series)

When the proximity switch is AND connected, the action of all proximity switches can drive load. The quantity of the proximity switches depends on the sum of saturation voltage. More connections are available given that it doesn't affect the supply voltage of the proximity switch. The response frequency of the proximity switch is the accumulation of initialized reset of various proximity switch.

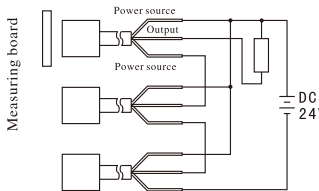


NPN connection of AND output

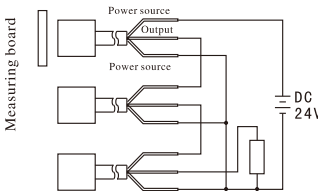

PNP connection of AND output

❖ Series and parallel connection of proximity switch

AND connection (series) NPN, PNP mixed-use

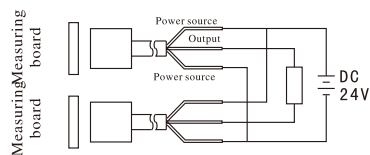

Promixity switches matters need attention

❖ Cautions when connected or disconnected with the power supply

When connecting the proximity switch with the counter and the programmable controller, there isn't any problem because of the built-in initialized reset circuit. Please avoid the conditions mentioned below

The detection object lies around the detection distance of the proximity switch; For DC voltage type and DC switch type, when power supply is turned on (turned off), time constant rises (drops) greatly; There is self-excitation and noise when the AC switch type proximity switch is power-on (off)


❖ Capacitor, light load

The proximity switch can't have the capacitor or light that has larger jumping current as the load directly connected to be connected through a relay or series connected with a current-limiting resistance. The peak current set by current-limiting resistance R is within the load current of the proximity switch; Make sure to connect through load.


$$\frac{\text{Supply voltage } V}{\text{Peak load current value of proximity switch } \text{mA}} \leq R(\text{K}\Omega)$$
$$\text{Allowable loss of resistance } R(\text{W}) = \frac{\text{Supply voltage } V^2}{\leq R(\text{K}\Omega)} \times 2 \text{ times above}$$

❖ Installation notice of proximity switch


Don't use it in the open air, and use a protective cover, if necessary.




Don't knock the detection surface with hard objects and use a protective cover, if necessary.




Don't use it in the environment with corrosive objects.




Don't fasten it with a big force, but fasten it with spring washer



The proximity switch must be equipped individually with metal flexible pipe, and don't make it with the electric line and power line in the same metal flexible pipe

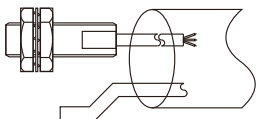

Don't stretch the power line of the proximity switch with a big force.



- ※ IP67 protection levelcan be used in various wet or watersplashingenvironments
- ※ ABS plastic shelinsulation,flame retardant,anti-corrosionand moisture-proof
- ※ Multiple specifications to choose from




Specifications

GTRIC®

Specifications				
Model	DC 5-wire Relay	E3K-K100-7MDJ	E3K-K100-R10MDJ	E3K-K100-D10MDJ
	AC 5-wire Relay	E3K-K100-7MAJ	E3K-K100-R10MAJ	E3K-K100-D10MAJ
	DC/AC 5-wire Relay	E3K-K100-7MGJ	E3K-K100-R10MGJ	E3K-K100-D10MGJ
	DC 3-wire NPN NC	E3K-K100-7MN1	/	/
	DC 3-wire NPN NC	E3K-K100-7MN2	/	/
	DC 3-wire PNP NO	E3K-K100-7MP1	/	/
	DC 3-wire PNP NC	E3K-K100-7MP2	/	/
	AC 2-wire NO	E3K-K100-7MA1	/	/
	AC 2-wire NC	E3K-K100-7MA2	/	/
Detection type		Diffuse reflection	Retro-refective	Through-beam
Sensing distance		0-7M	0-10M	0-10M
Distance Adjustment method		Head potentiomete		
Directional Angle		3°-10°		
Standard Sensing Object		Opaque/Translucent		
Light Source		Red light-emitting diode (624 nm)		
Ambient illuminance		incandescent lights3000Lux sunshines10000Lu		
Operating Voltage		DC 5-wire Relay:12-24V:DC-AC 5-wire Relay:90-250VAC DC/AC 5-wire Relay:24-240V DC/AC DC 3-wire:12-24v DC		
Consumption current		30mA Max		
Response time		<20ms		
Load current		200mA Max		
Leakage current		≤1.1mAno-load		
Residual Voltage		DC:≤0.7V AC:≤10V		
Shock		500m/s(50G) ineach X,YZ direction for 3times		
Vibration		1.5mm amplitude atfre quency 10~55Hz (forlmin) ineach X,Z,direction for 2hours		
Ambienttem perature		-20~+55℃		
Working Humidity		35- 85%		
Protection degree		IP67		
Connection		2m PVC cable		
Sensingside		ABS		

Dimension

GTRIC®

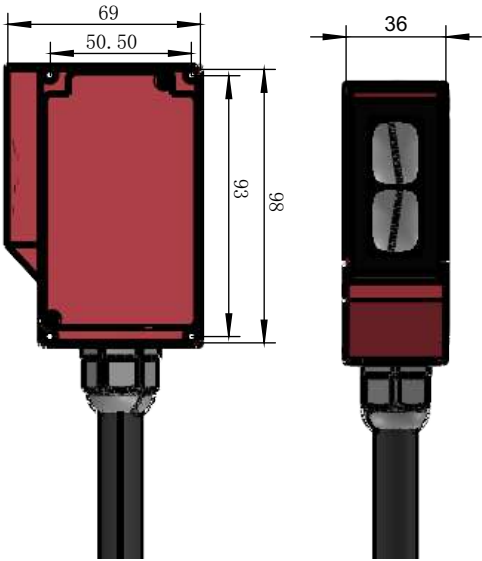



Wenzhou Gtric Technology Co., Ltd.

Wenzhou Gtric Technology Co., Ltd.
TEL:0577-62734566
Web:<http://www.gtric.com>
Mail:yaohaofeng@gtric.com