



# Company introduction

Wenzhou Gtric Technology Co., Ltd. is located in Yueqing IoT sensors Park, which covers 5,000 square meters, with over 100 employees. We are focuses on intelligent manufacturing and industrial automation, our main businesses are sensors, encoders, button switch, coupling, expansion set and other industrial automation products, providing standard and individual products and solutions for customers.

Our products cover over 20 series, 1000specificatison, which have passed CCC, CE, UL, ISO9001 certification as well as EU RoHS Environmental Directives.

Based on our technical advantages, Gtric can provide industrial automation solution according to customers' requirements.

**We support OEM & ODM, if you need  
please feel free to contact us**



Installation conditions

Non shielded proximity switches can achieve maximum operating distance (with the diameter of the relevant); but in order to prevent the switch around the metal impact on the switch, the sensor head must be in a certain gap with the surrounding metal (Figure 1).

Due to the special shielding effect inside the shield, the radial magnetic field of the side is reduced, and the induction distance is about 60% of the non shield type, because it can be flush mounted in the metal (Figure 2).

The magnetic sensor is not affected by the conditions of installation, as long as the material around the material is not magnetized.



Output mode and electrical characteristics

<p>DC 2-wire system NO or NC</p> <p>The load must be connected in series in the sensor to work, there is a polarity and short circuit protection function; in the open circuit state, there is a very small leakage current; in the closed circuit, the switching element has a smaller voltage drop.</p>	<div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div>	Yes	NO	NC	No			Action			Reset			ON			OFF																				
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					
<p>DC 3-wire system(N,P type) NO or NC</p> <p>These switches are connected to the load and power supply separately; the polarity, short circuit and overload protection function, and the residual current can be ignored.</p>	<div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div> <div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div>	Yes	NO	NC	No			Action			Reset			ON			OFF			Yes	NO	NC	No			Action			Reset			ON			OFF		
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					
<p>AC 2-wire system NO or NC</p> <p>The load must be connected in series in the sensor, in the closed circuit, the switching element has a smaller voltage drop.</p>	<div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div>	Yes	NO	NC	No			Action			Reset			ON			OFF																				
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					
<p>DC 4-wire system (NPN,PNP Type) NO+NC</p> <p>Sensor switches can provide 2 groups of output NO+NC</p>	<div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div> <div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div>	Yes	NO	NC	No			Action			Reset			ON			OFF			Yes	NO	NC	No			Action			Reset			ON			OFF		
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					
<p>DC 4-wire system (NPN,PNP Type) NO/NC</p> <p>The switches can provide two groups of output NO or NC</p>	<div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div> <div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div>	Yes	NO	NC	No			Action			Reset			ON			OFF			Yes	NO	NC	No			Action			Reset			ON			OFF		
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					
<p>NO+NC Ac/Dc five wire (relay output) NO + NC</p> <p>These switches can provide to often open, closed two group relay output.</p>	<div></div> <div><p>Detection object</p><p>Load</p><p>Indicator detected</p></div> <div><table><tr><td>Yes</td><td>NO</td><td>NC</td></tr><tr><td>No</td><td></td><td></td></tr><tr><td>Action</td><td></td><td></td></tr><tr><td>Reset</td><td></td><td></td></tr><tr><td>ON</td><td></td><td></td></tr><tr><td>OFF</td><td></td><td></td></tr></table></div>	Yes	NO	NC	No			Action			Reset			ON			OFF																				
Yes	NO	NC																																			
No																																					
Action																																					
Reset																																					
ON																																					
OFF																																					




Sensor characteristics


GTRIC®

❖ Series and parallel connection of proximity switch

OR connection ( NPN and PNP types can be used mixed ) series When the proximity switch is OR connected, the action of any proximity switch can drive load. The quantity of the proximity switches depends on the sum of leakage current. More connections are available given that it doesn't affect the loading action.

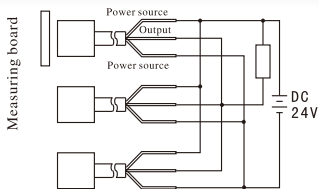


OR connection of NPN output

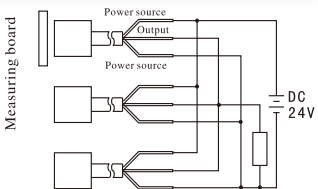


OR connection of PNP output

❖ AND connection (series)

When the proximity switch is AND connected, the action of all proximity switches can drive load. The quantity of the proximity switches depends on the sum of saturation voltage. More connections are available given that it doesn't affect the supply voltage of the proximity switch. The response frequency of the proximity switch is the accumulation of initialized reset of various proximity switch.

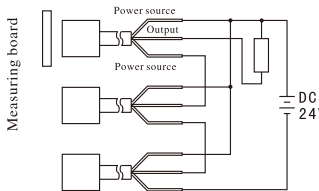


NPN connection of AND output

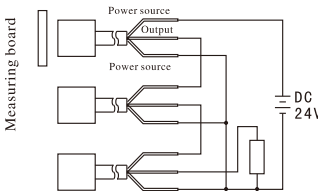

PNP connection of AND output

❖ Series and parallel connection of proximity switch

AND connection (series) NPN, PNP mixed–use

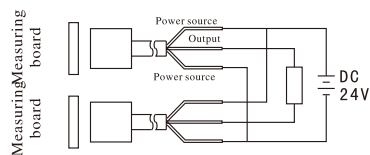

Promixity switches matters need attention

❖ Cautions when connected or disconnected with the power supply

When connecting the proximity switch with the counter and the programmable controller, there isn't any problem because of the built-in initialized reset circuit. Please avoid the conditions mentioned below

The detection object lies around the detection distance of the proximity switch; For DC voltage type and DC switch type, when power supply is turned on (turned off), time constant rises (drops) greatly; There is self-excitation and noise when the AC switch type proximity switch is power-on (off)


❖ Capacitor, light load

The proximity switch can't have the capacitor or light that has larger jumping current as the load directly connected to be connected through a relay or series connected with a current-limiting resistance. The peak current set by current-limiting resistance R is within the load current of the proximity switch; Make sure to connect through load.


$$\frac{\text{Supply voltage } V}{\text{Peak load current value of proximity switch } \text{mA}} \leq R(\text{K}\Omega)$$
$$\text{Allowable loss of resistance } R \text{ (W)} = \frac{\text{Supply voltage } V^2}{\leq R(\text{K}\Omega)} \times 2 \text{ times above}$$

❖ Installation notice of proximity switch


Don't use it in the open air, and use a protective cover, if necessary.




Don't knock the detection surface with hard objects and use a protective cover, if necessary.




Don't use it in the environment with corrosive objects.




Don't fasten it with a big force, but fasten it with spring washer



The proximity switch must be equipped individually with metal flexible pipe, and don't make it with the electric line and power line in the same metal flexible pipe

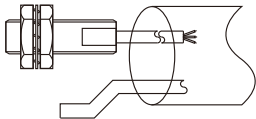

Don't stretch the power line of the proximity switch with a big force.



- ※ With overload short circuit, reverse connection protection, surge absorption
- ※ Can sense non-metallic objects



Selection Guide

GTRIC®

C	R	12	04	N	1		
①	②	③	④	⑤	⑥	⑦	⑧
① <b>Model</b> :L:Inductive、C:Capacitive、M:Reed Magnetic Switch、H:Hall switch、F:remote inductive							
② <b>External structure</b> :R: Cylindrical、F: Corner column type							
③ <b>DIA. of sensing side</b> :Number: DIA. of sensing side (unit:mm)							
④ <b>Sensing distance</b> :Number: Sensing distance (unit:mm)							
⑤ <b>Power supply</b> :N: NPN 10-30VDC 3-wire、P: PNP 10-30VDC 3-wire、D: 10-30VDC 2-wire A: 90-250VAC 2-wire							
⑥ <b>Control output</b> :1: Normally open、2: Normally closed							
⑦ <b>Connection</b> :No mark: Cable type、P: Connector type、WP: Cable connector type							
⑧ <b>Tail line length</b> :No mark:2M Cable number: (unit m)							


Specifications

GTRIC®

Specifications		
Model	DC3-wireNPN.NO	CR12-02N1
	DC3-wireNPN.NC	CR12-02N2
	DC3-wirePNP.NO	CR12-02P1
	DC3-wirePNP.NC	CR12-02P2
	AC2-wire NO	\
	AC2-wire NC	\
Mounting		Flush
Sensingdistance		2mm±20%
Hysteresis		≤20%
Detect objects		Conductors and Dielectrics
Standardsensingtarget		Ground metal plate 50*50*1mm
Supplyvoltage		DC:10-30VDC
Response frequency(F)		500Hz (DC)
Load current		200mA
Voltagedrop		≤2.5V
Circuitprotection		Short-circuit,overload,reversepolarityprotection
Outputindicator		Red LED
Ambienttemperature		-20~+70℃
Shock		500m/s(50G)ineachX,Y,Z directionfor 3 times
Vibration		1mm amplitudeatfre quency 10~55Hz(for1min) ineachX.Y Zdirection for 2hours
Protectiondegree		IP65
Connection		2mPVCcable
Meterial		Nickel-copperalloy
Sensing side		PBT

Dimension

GTRIC®

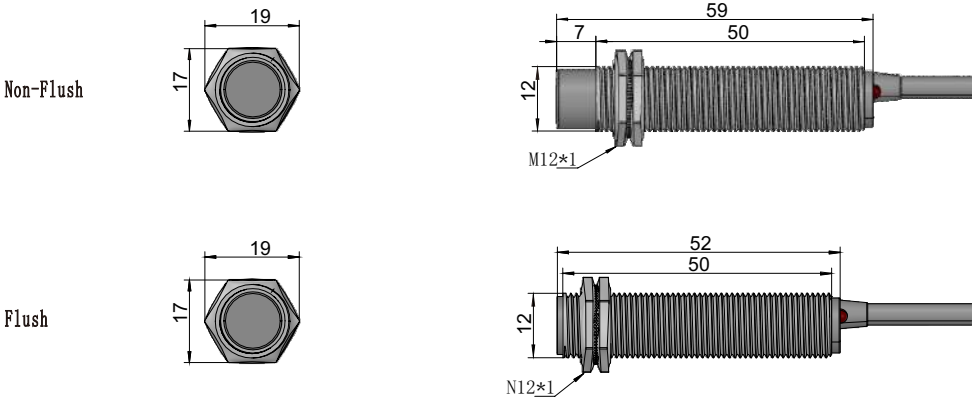

- ✱ With overload short circuit, reverse connection protection, surge absorption
- ✱ Can sense non-metallic objects



Selection Guide

GTRIC®

C	R	18	04	N	1	<div></div>	<div></div>
①	②	③	④	⑤	⑥	⑦	⑧
① <b>Model</b> :L:Inductive、C:Capacitive、M:Reed Magnetic Switch、H:Hall switch、F:remote inductive							
② <b>External structure</b> :R: Cylindrical、F: Corner column type							
③ <b>DIA. of sensing side</b> :Number: DIA. of sensing side (unit:mm)							
④ <b>Sensing distance</b> :Number: Sensing distance (unit:mm)							
⑤ <b>Power supply</b> :N: NPN 10-30VDC 3-wire、P: PNP 10-30VDC 3-wire、D: 10-30VDC 2-wire A: 90-250VAC 2-wire							
⑥ <b>Control output</b> :1: Normally open、2: Normally closed							
⑦ <b>Connection</b> :No mark: Cable type、P: Connector type、WP: Cable connector type							
⑧ <b>Tail line length</b> :No mark:2M Cable number: (unit m)							


Specifications

GTRIC®

Specifications			
Model	DC3-wireNPN.NO	CR18-05N1	CR18-10N1
	DC3-wireNPN.NC	CR18-05N2	CR18-10N2
	NPN.NO+NC	CR18-05N3	CR18-10N3
	DC3-wirePNP.NO	CR18-05P1	CR18-10P1
	DC3-wirePNP.NC	CR18-05P2	CR18-10P2
	PNPNO+NC	CR18-05P3	CR18-10P3
	AC2-wireNO	CR18-05A1	CR18-10PA1
	AC2-wireNC	CR18-05A2	CR18-10PA2
	AC3-wireNO+NC	CR18-05A3	CR18-10PA3
Mounting		Flush	Non-Flush
Sensingdistance		5mm±20%	10mm±20%
Hysteresis		≤20%	≤20%
Detect objects		Conductors and Dielectrics	
Standardsensingtarget		Ground metal plate50*50*1mm	
Supplyvoltage		DC:10-30VDC	
Response frequency(F)		500Hz(DC)25Hz(AC)	
Load current		200mA	
Voltage drop		≤2.5V	
Circuitprotection		Short-circuit,overload,reversepolarityprotection	
Outputindicator		Red LED	
Ambienttemperature		-20~+70℃	
Shock		500m/s(50G)ineachX,Y,Zdirectionfor3times	
Vibration		1mm amplitudeatfre quenc y10~55Hz(for1min) ineachX,Y Zdirection for 2hours	
Protectiondegree		IP65	
Connection		2m PVC cable	
Meterial		Nickel-copperalloy	
Sensing side		PBT	

Dimension

GTRIC®

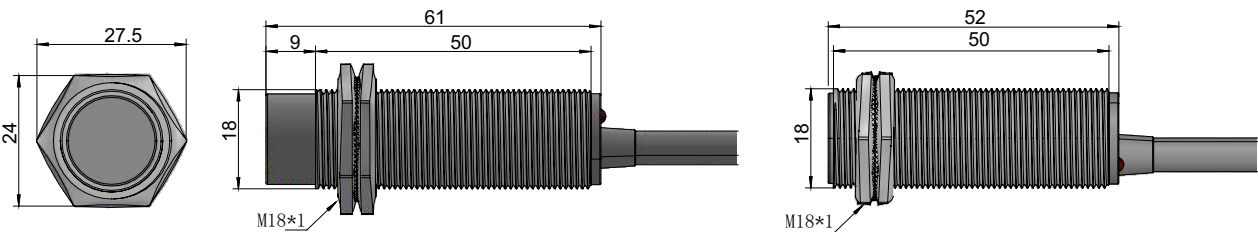

- ✱ With overload short circuit, reverse connection protection, surge absorption
- ✱ Can sense non-metallic objects



Selection Guide

GTRIC®

C	R	30	10	N	1		
①	②	③	④	⑤	⑥	⑦	⑧
① <b>Model</b> :L:Inductive、C:Capacitive、M:Reed Magnetic Switch、H:Hall switch、F:remote inductive							
② <b>External structure</b> :R: Cylindrical、F: Corner column type							
③ <b>DIA. of sensing side</b> :Number: DIA. of sensing side (unit:mm)							
④ <b>Sensing distance</b> :Number: Sensing distance (unit:mm)							
⑤ <b>Power supply</b> :N: NPN 10-30VDC 3-wire、P: PNP 10-30VDC 3-wire、D: 10-30VDC 2-wire A: 90-250VAC 2-wire							
⑥ <b>Control output</b> :1: Normally open、2: Normally closed							
⑦ <b>Connection</b> :No mark: Cable type、P: Connector type、WP: Cable connector type							
⑧ <b>Tail line length</b> :No mark:2M Cable number: (unit m)							




Specifications

GTRIC®

Specifications			
Model	DC3-wireNPN.NO	CR30-10N1	CR30-20N1
	DC3-wireNPN.NC	CR30-10N2	CR30-20N2
	NPN.NO+NC	CR30-10N3	CR30-20N3
	DC3-wirePNP.NO	CR30-10P1	CR30-20P1
	DC3-wirePNP.NC	CR30-10P2	CR30-20P2
	PNPNO+NC	CR30-10P3	CR30-20P3
	AC2-wire NO	CR30-10A1	CR30-20A1
	AC2-wireNC	CR30-10A2	CR30-20A2
	AC3-wireNO+NC	CR30-10A3	CR30-20A3
Mounting		Flush	Non-Flush
Sensingdistance		10mm+20%	20mm±20%
Hysteresis		≤20%	≤20%
Detect objects		Conductors and Dielectrics	
Standardsensingtarget		Ground metal plate50*50*1mm	
Supplyvoltage		DC:10-30VDC	
Response frequency(F)		500Hz(DC)25Hz(AC)	
Load current		200mA	
Voltagedrop		≤2.5V	
circuitprotection		Short-circuitoverloadreversepolarityprotection	
Outputindicator		Red LED	
Ambienttemperature		-20~+70℃	
Shock		500m/s(50G)ineachX,Y,Zdirectionfor3times	
Vibration		1mm amplitudeatfre quenc y10~55Hz(for1min) ineachX.Y Zdirection for 2hours	
Protectiondegree		IP65	
Connection		2m PVC cable	
Meterial		Nickel-copperalloy	
Sensingside		PBT	

Dimension

GTRIC®





**GTRIC<sup>®</sup>**

Wenzhou Gtric Technology Co., Ltd.

Wenzhou Gtric Technology Co., Ltd.  
TEL:0577-62734566  
Web:<http://www.gtric.com>  
Mail:[yaohaofeng@gtric.com](mailto:yaohaofeng@gtric.com)